


Correct cushion installation


How to prepare your back and corner cushion for installation

Open the hook-and-loop fasteners on the outdoor sling fabric before installing the cushions.
The hook fastener is used to attach the back and corner cushions to the bottom of the seat cushion.

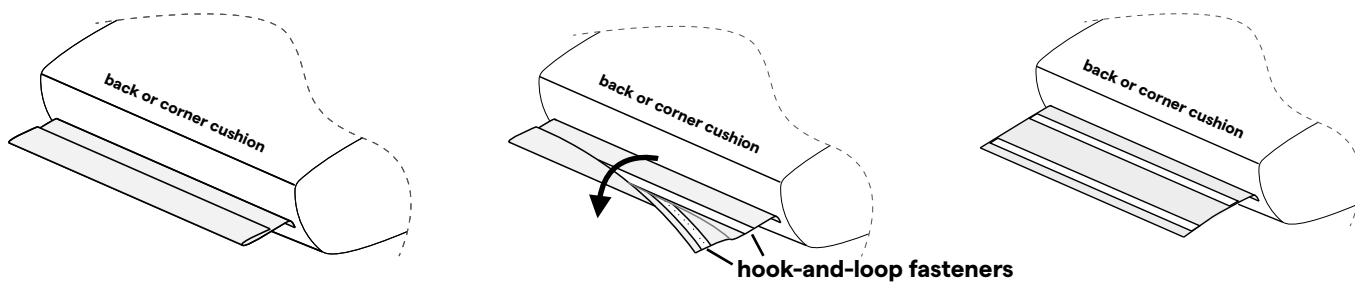


How to correctly place your cushion in the furniture module


- 1 Place the seat back and corner cushions in the correct position, with the front facing upwards. This is also shown on the labels at the bottom of the sling fabric.

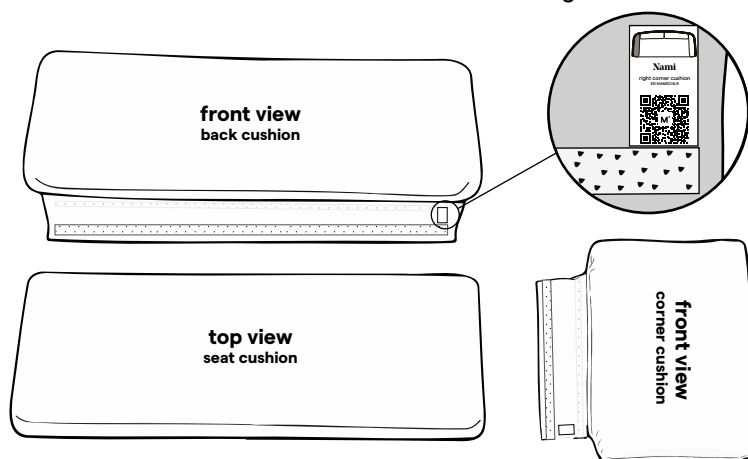


- 2 Turn the seat cushion over so the hook-and-loop fasteners are visible. The back and corner cushions should face up with the back side.

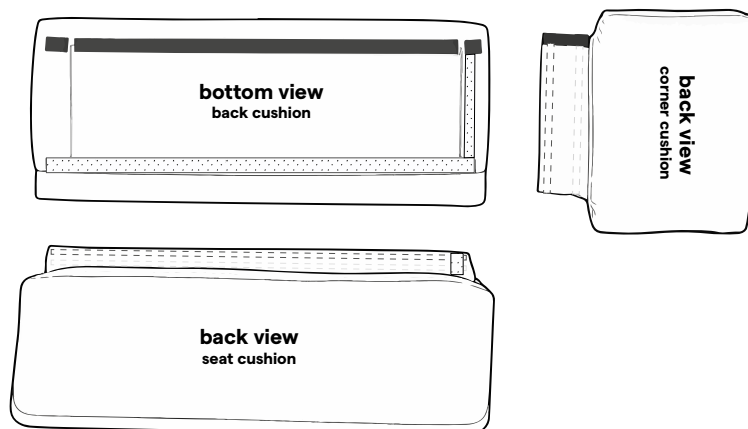


- 3 Attach the back cushion using the white hook-and-loop fasteners provided. Make sure they are aligned neatly in the centre to ensure the cushion is positioned correctly.

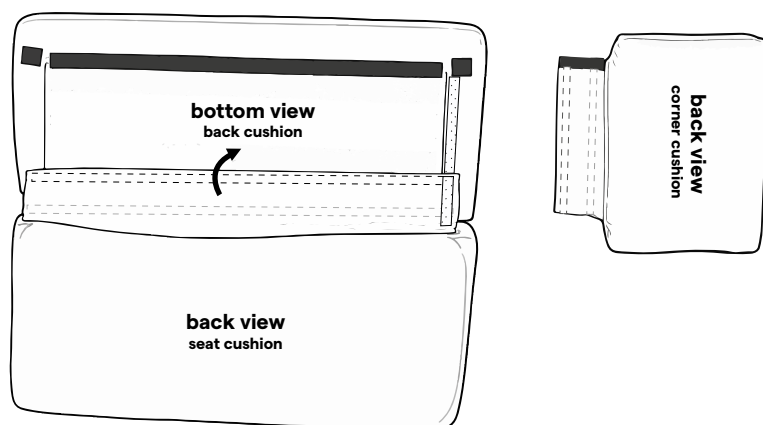

- 4 Attach the corner cushion using the white hook-and-loop fasteners provided. Make sure they are aligned neatly in the centre of the hook-and-loop to ensure the cushion is positioned correctly.

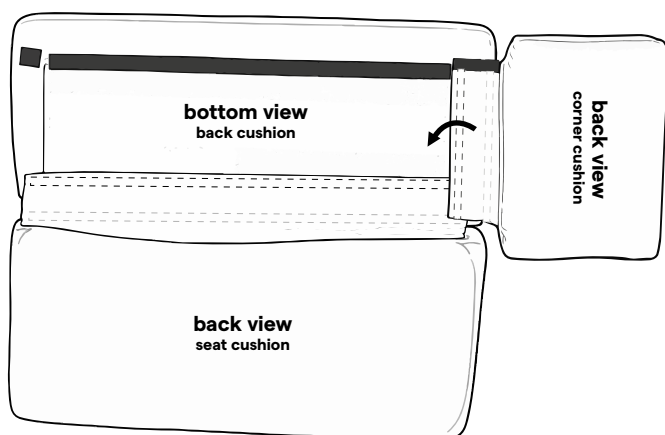


- 5 Place the cushion set inside the furniture module. Make sure that the black hook-and-loop fasteners on the cushions line up neatly with those on the furniture module.

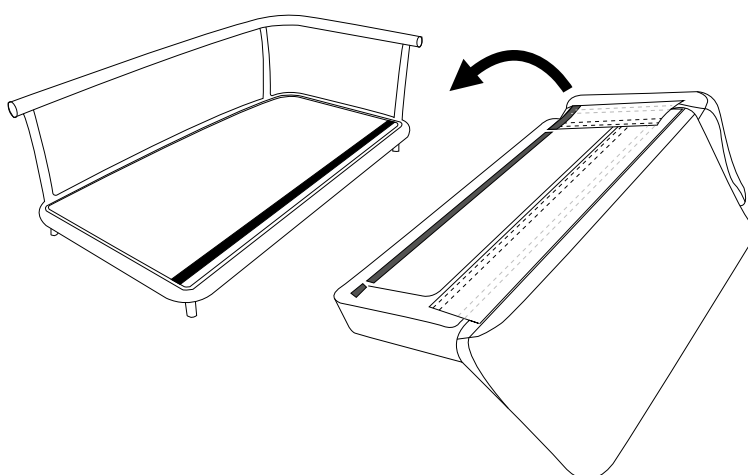

2 PERSONS REQUIRED

- 6 Position the cushions so that they overlap the furniture module by about 1 to 2 cm on all sides. Gently pull the corners of the back and corner cushions downwards to ensure a neat fit in the corners.

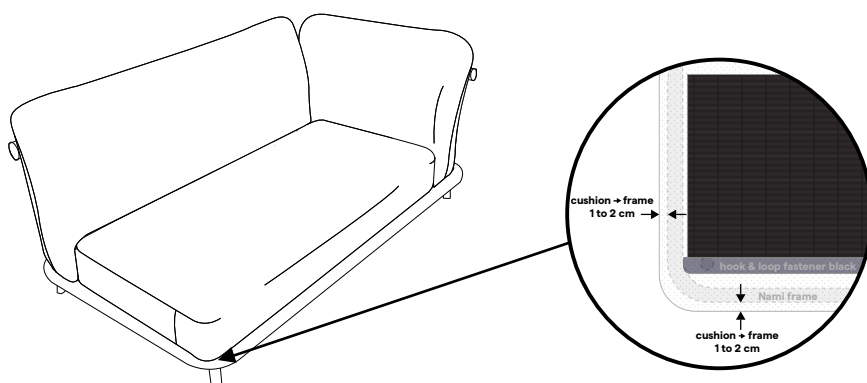

How to prepare your cushion for washing

First remove the cushion covers. Then close the hook-and-loop fasteners on the sling before washing the cushions. These hook-and-loop fasteners may damage the cushions during washing if they are not properly closed

